

Specifications

Console

- SPI Ioniser (included).
- Slim design: only 199 mm in depth.
- Two separate air outlets, upper (cooling) and bottom (heating) to avoid stratification.

- Long-life washable permanent filter.
- Auto Restart function.
- Remote controller included in console units



Indoor Unit		AJ026TNJDKG/EU	AJ035TNJDKG/EU	AJ052TNJDKG/EU	
Capacity	Cooling	kW	2.6	3.5	5.2
	Heating up to +7 °C	kW	2.9	3.8	5.6
Performance	Airflow Rate	m ³ /min	9.0/7.8/6.7	10.5/9.3/8.2	11.2/9.9/8.6
	Sound Power	dB(A)	53	57	60
	Sound Pressure	H/M/L	dB(A)	36/31/23	38/35/24
Electrical Data					
Power Source	Φ, #, V, Hz	1Φ, 2, 220-240 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz	
Power Consumption	Cooling	W	30	35	50
	Heating	W	30	35	50
Current Input	Cooling	A	0.25	0.29	0.29
	Heating	A	0.25	0.29	0.29
Dimensions					
Net Dimensions (W x H x D)	mm	720 x 199 x 620	720 x 199 x 620	720 x 199 x 620	
Net Weight	kg	15.7	15.7	15.7	
Refrigerant					
Piping Connections	Liquid Pipe	ø, inch	1/4	1/4	1/4
	Gas Pipe	ø, inch	3/8	3/8	1/2
Piping Connections	Drain Pipe	ø, mm	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)


Accessories



Advanced Wired Controller	Simple Type Controller	Touch Controller	Wi-Fi Kit	Remote controller (Included)
MWR-WG00JN/MWR-WG00KN	MWR-SH00N	MWR-SH11N	MIM-H04EN	AR-EH03E

Dimensional drawings

Console

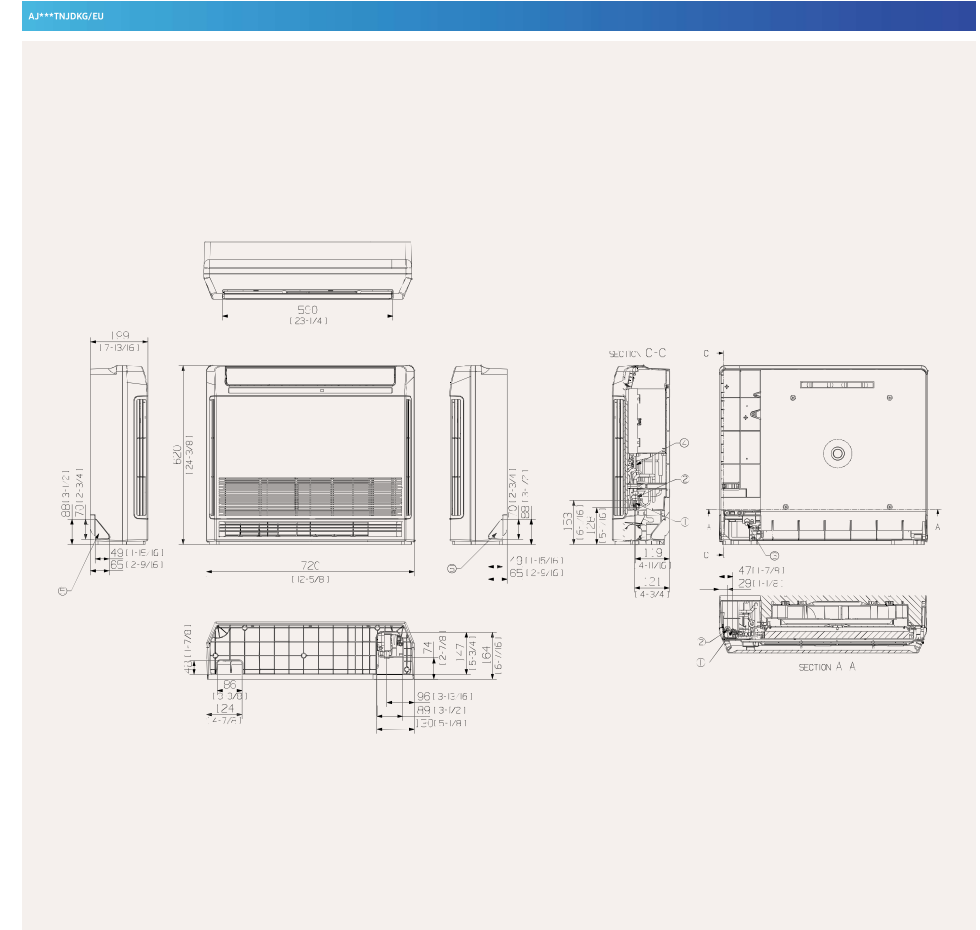

NO	Name	Description	
		AJ026TNJDKG/EU	AJ035/052TNJDKG/EU
1	Liquid pipe connection		ø6.35 (1/4)
2	Gas pipe connection	ø9.52 (3/8)	ø12.70 (1/2)
3	Drain pipe connection		ID18 (1.176) Hose
4	Power supply/communication wiring conduits		
5	Knockout hole for drain hose		